

Job Name	
Order No.	

# HITACHI

<b>Submittal Data Sheet</b>	RAD-GJ12QHAA
12,000 Btu/hr Ducted Indoor Unit	



<b>Indoor Specifications</b>				
Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	300	259	309	276
	L	SL	L	SL
229	194	235	200	
Sound (dBA) H / M / SL		Cooling		Heating
		41/37/30		42/38/30
Dimensions (W x H x D) (in)		29.53 x 9.25 x 15.75		
Weight (Lbs)		35		
External Static Pressure		0.3		
Nominal Capacity (Btu/hr)		12,000		

Recommended cable between Outdoor and Indoor 14AWG - 18AWG 4 conductors stranded copper wire and Power wiring cable size must comply with applicable national and local codes.


<b>Electrical</b>		
	Cooling	Heating
Running Current (Rated) (A)	0.54	
Power Consumption (Rated) (W)	Refer to Outdoor	

<b>Piping</b>	
Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	0.63


<b>Optional Accessories:</b>	
Description	Part Number
Remote Controller with Receiver Kit	SPX-RKDN1
Remote Controller with Receiver Kit French	SPX-RKDN3
Wired Controller	SPX-URFG1
Wi-Fi Adapter	SPX-WFA01
Extension Cable for Wi-Fi Adapter	SPX-WFG58CM
H-Link Adapter IDU	PSC-6RAD
Adapter for Wired Remote Group Controller	SPX-DST1
26.2 ft (8m) Wire Cable for Distributor SPX-DST1	SPX-WDST8M
Dry Contact	SPX-WDC3
ON/OFF Status and Alarm Signal	SPX-WDC8
Float Switch	PMRAMD-350BWR11

Factory default installation position is Bottom side suction.  
 However, Back side suction installation is also allowable  
 with some plate adjustment position.


Unit: inch(mm)

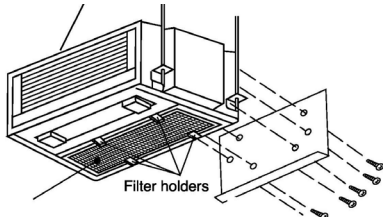

Bottom side suction opening

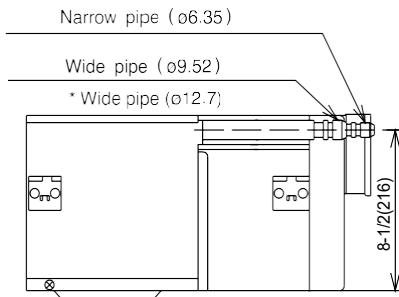


### BOTTOM SUCTION

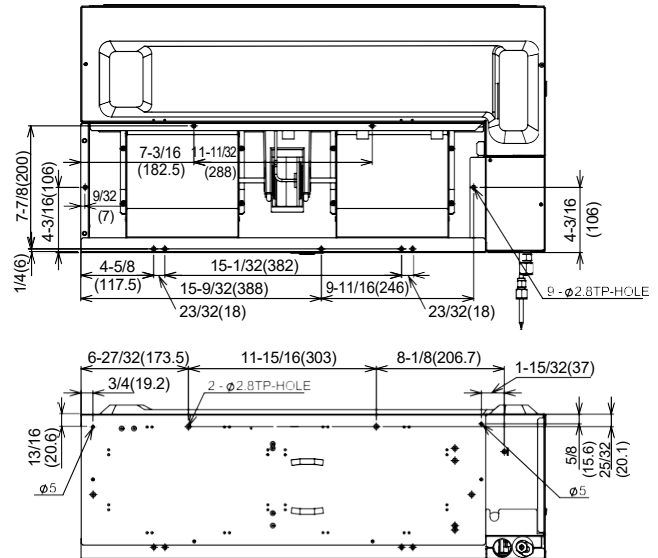


Recommended cable between Outdoor and Indoor 14AWG - 18AWG 4 conductors stranded copper wire and Power wiring cable size must comply with applicable national and local codes.



Unit: inch(mm)

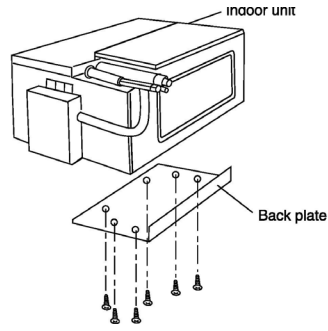

Back side suction opening

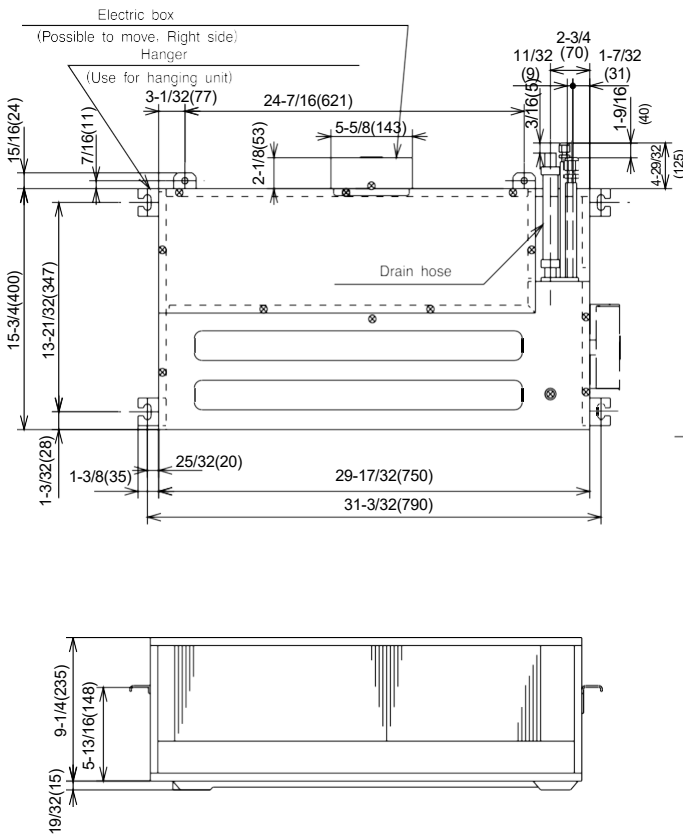

## BACK SUCTION

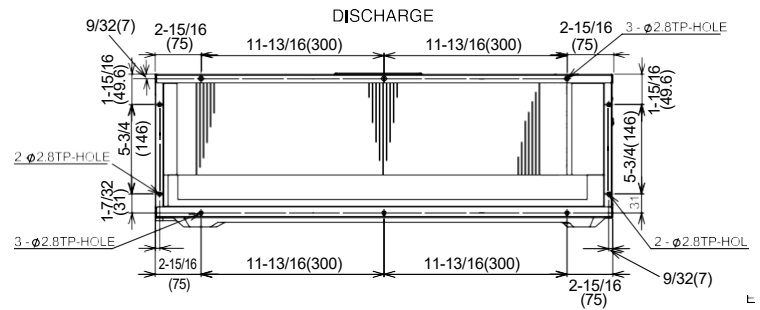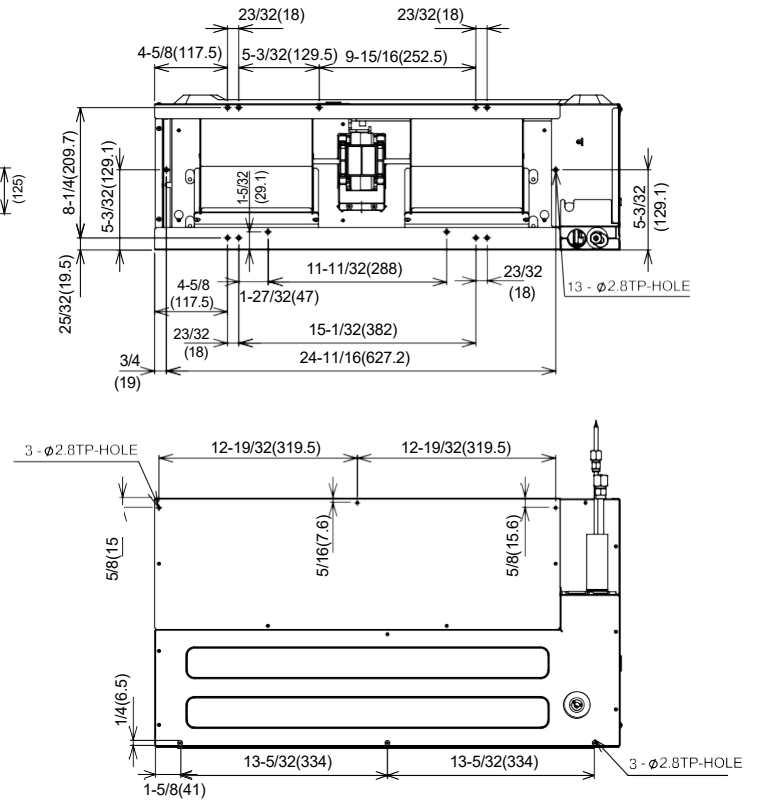

Recommended cable between Outdoor and Indoor 14AWG - 18AWG 4 conductors stranded copper wire and Power wiring cable size must comply with applicable national and local codes.

