


**AC POWER SUPPLY**

**PSH300A**

300 VA Power Supply, Three 100 VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac, Metal Enclosure

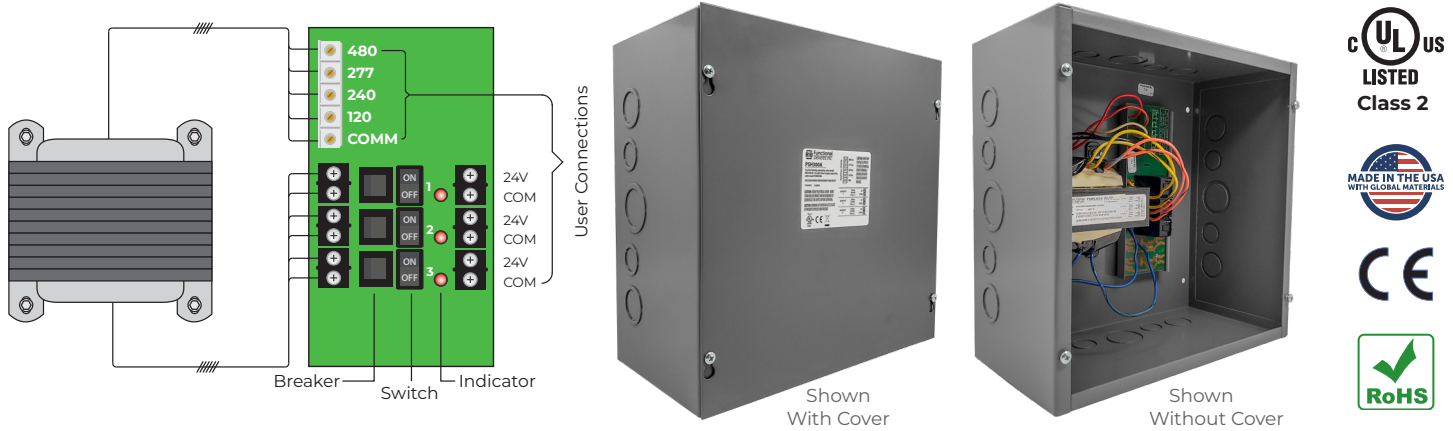

**SPECIFICATIONS**

<b>Transformer</b>	One (1) 300 VA	<b>Standby Wattage</b>	16.61 W @ 120 Vac 17.70 W @ 240 Vac 16.26 W @ 277 Vac 19.20 W @ 480 Vac
<b>Over Current Protection</b>	Circuit Breaker	<b>Full Load Primary Current</b>	2.66 A @ 120 Vac 1.36 A @ 240 Vac 1.18 A @ 277 Vac 0.68 A @ 480 Vac
<b>Primary</b>	480/277/240/120 Vac	<b>Secondary Output Voltage vs. Load</b>	24.5 V @ 1 Amp 23.5 V @ 2 Amp 22.8 V @ 3 Amp 22.3 V @ 4 Amp
<b>Frequency</b>	50/60 Hz	<b>Housing</b>	NEMA 1 Metal Enclosure
<b>24 Vac ON/OFF</b>	On / Off Switch & Breaker	<b>Origin</b>	Made of US and non-US parts
<b>5 Secondaries</b>	24 Vac, with LED Indicators		
<b>Input</b>	480/277/240/120 Vac <b>Finger-Safe Terminals</b> , 8-18 AWG		
<b>Output</b>	3 Ungrounded, Isolated, 100 VA, Class 2, 24 Vac Outputs. Terminals accept 12-26 AWG wire.		
<b>Ambient Temperature Derating</b>	4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C (When All 3 Outputs Operated Simultaneously) · With 120 Vac primary input voltage · When all 3 outputs operated simultaneously, at room temperature		
<b>Dimensions</b>	12.125" H x 12.125" W x 6.000" D		
<b>Approvals</b>	Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special <b>^ Seismic Certification of Equipment and Components: OSP-0201-10</b>		

**NOTE**

Primary voltage terminal cover available